


VALVE REGULATED LEAD-ACID BATTERY



Dimensions

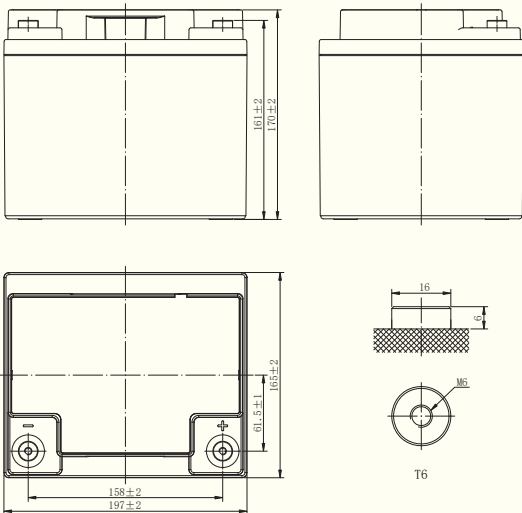

- ABS container;
- Absorbent glass mat technology (AGM).

Applications

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- DC power supply
- Auto control system

General Features

- 5 years design life (25°C)
- Lead calcium alloy, sealed design, no watering required
- Puncture resistant micro-porous glass mat separators extend life
- Unique technology optimizes power capacity, cell consistency, and long-term reliability
- Designed for a wide range of applications

Standards

- Compliance with IEC 60896 standards EU Battery Directive
- Manufactured by ISO & CE certified Company

Specifications

Nominal Voltage		12 V
Capacity (25°C)	10HR (10.80V)	40Ah
	5HR (10.50V)	35Ah
	1HR (9.60V)	24.8Ah
Dimension	Length	195±2mm
	Width	161±2mm
	Height	158±2mm
	Total Height	170±2mm
Approx. Weight		11.70Kg±5%
Terminal type		M6
Internal resistance (Fully charged, 25°C)		Approx. 9 mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C±3°C (77°F±5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage (25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage (25°C)		14.10 to 14.40V Temperature compensation: -30mV/°C
Standard / Maximum charging current		4A / 12A
Terminal material		Copper
Maximum discharge current		480A (5 sec.)
Designed floating life (25°C)		10 years







VALVE REGULATED LEAD-ACID BATTERY

Discharge Table

Constant Current Discharge (Amperes) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	83.2	59.2	51.3	40.3	36.1	26.4	22.3	16.2	13.6	9.99	7.84	6.80	5.99	4.61	3.82	2.03
1.80V/cell	94.6	67.2	58.1	45.6	39.3	28.0	23.1	16.7	14.1	10.8	8.36	7.15	6.44	4.85	4.00	2.10
1.75V/cell	102.8	72.8	62.9	49.2	40.1	29.0	24.3	17.6	14.8	11.1	8.52	7.28	6.49	4.88	4.04	2.12
1.70V/cell	109.9	77.7	66.9	52.2	40.9	29.5	24.8	18.0	15.1	11.3	8.67	7.40	6.52	4.95	4.08	2.14
1.67V/cell	113.7	80.1	68.8	53.6	41.5	30.0	25.1	18.2	15.3	11.4	8.80	7.55	6.55	5.02	4.13	2.17
1.60V/cell	117.8	82.9	70.9	55.0	42.1	30.4	25.5	18.5	15.5	11.5	8.91	7.66	6.60	5.09	4.18	2.19

Constant Power Discharge (Watts/cell) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	155.4	111.3	97.1	76.7	70.3	50.7	44.1	32.0	27.0	19.9	15.7	13.7	11.8	9.33	7.75	4.12
1.80V/cell	173.9	124.5	108.7	85.8	75.9	53.4	45.4	33.0	27.8	21.5	16.7	14.3	12.7	9.79	8.10	4.26
1.75V/cell	185.6	132.9	116.0	91.6	76.9	55.0	47.4	34.5	29.1	21.9	16.9	14.5	12.7	9.82	8.17	4.30
1.70V/cell	195.1	139.7	121.9	96.3	77.8	55.7	48.1	35.0	29.6	22.2	17.2	14.7	12.8	10.0	8.25	4.34
1.67V/cell	198.3	142.0	123.9	97.9	78.3	56.2	48.6	35.4	29.9	22.3	17.4	15.0	12.8	10.1	8.34	4.39
1.60V/cell	201.0	144.0	125.6	99.3	78.7	56.5	48.9	35.6	30.1	22.4	17.5	15.1	12.9	10.2	8.42	4.43

Note: The above characteristics data can be obtained within three charge/discharge cycles.

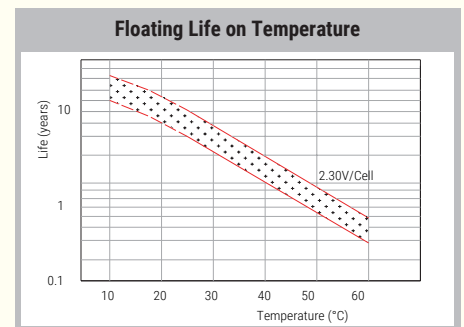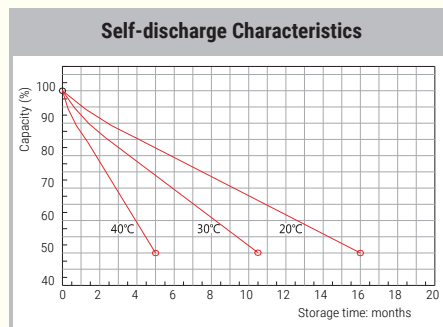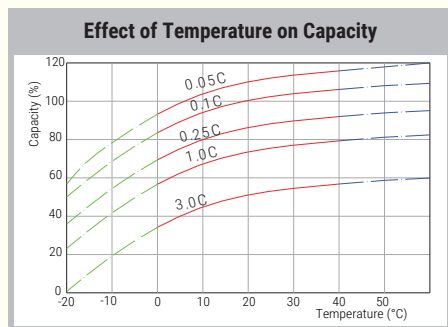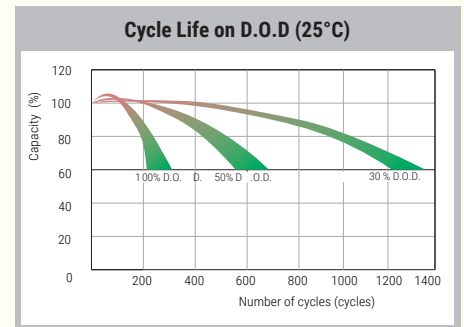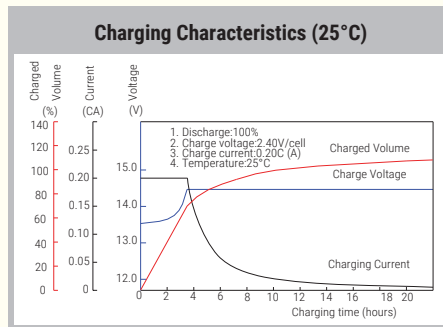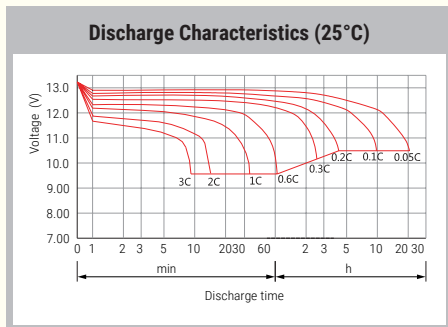

This specification provided by Lab report might differ from the practically tests.

